
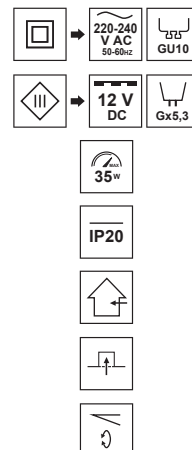


# OSMIN RING

EDO®

EDO777230

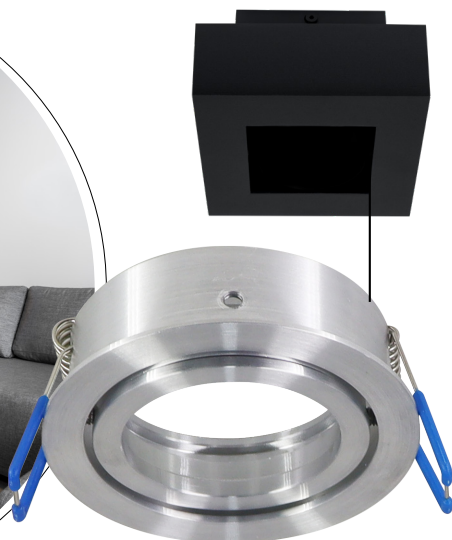

## Decorative ring OSMIN RING

OSMIN RIM rings are used to enable the customer to personalize his ceiling lamp according to his needs.

| SPECIFICATIONS         | EDO777230                            |
|------------------------|--------------------------------------|
| Application:           | inside                               |
| Type of assembly:      | OSMIN RIM/ recessed into the ceiling |
| Installation site:     | ceiling                              |
| Colour:                | silver                               |
| Type of finish:        | brushed                              |
| Material:              | aluminium                            |
| Dimensions:            |                                      |
| -width [mm]:           | ø74mm                                |
| -length [mm]:          | -                                    |
| -ring diameter [mm]:   | ø55mm                                |
| -height [mm]:          | 2mm                                  |
| -overall height [mm]:  | 23mm                                 |
| -mounting hole [mm]:   | ø65/70mm                             |
| Adjustable:            | yes                                  |
| Shutter:               | -                                    |
| Socket included:       | no                                   |
| Socket type:           | GU10/ Gx3,5                          |
| Number of slots:       | 1                                    |
| Light source included: | no                                   |

| TECHNICAL DATA                                    |                        |
|---------------------------------------------------|------------------------|
| Maximum power [W]:                                | 35W                    |
| Rated voltage [V]:                                | 220-240 V AC / 12 V DC |
| Rated frequency [Hz]:                             | 50-60 Hz               |
| IP:                                               | IP20                   |
| Protection class:                                 | II/III                 |
| Mercury content:                                  | no                     |
| Environmental conditions [°C]:                    | -20...50°C             |
| The minimum distance from illuminated object [m]: | 0,5m                   |

| LOGISTIC DATA               |        |
|-----------------------------|--------|
| Collective packaging [pc.]: | 100pc. |
| Weight [g]:                 | 57g    |
| Weight with packaging [g]:  | 70g    |

EAN:



5 904252 615201

