



High-bay LED VITI PRO

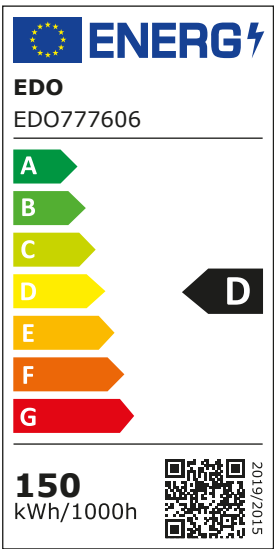

EDO777606

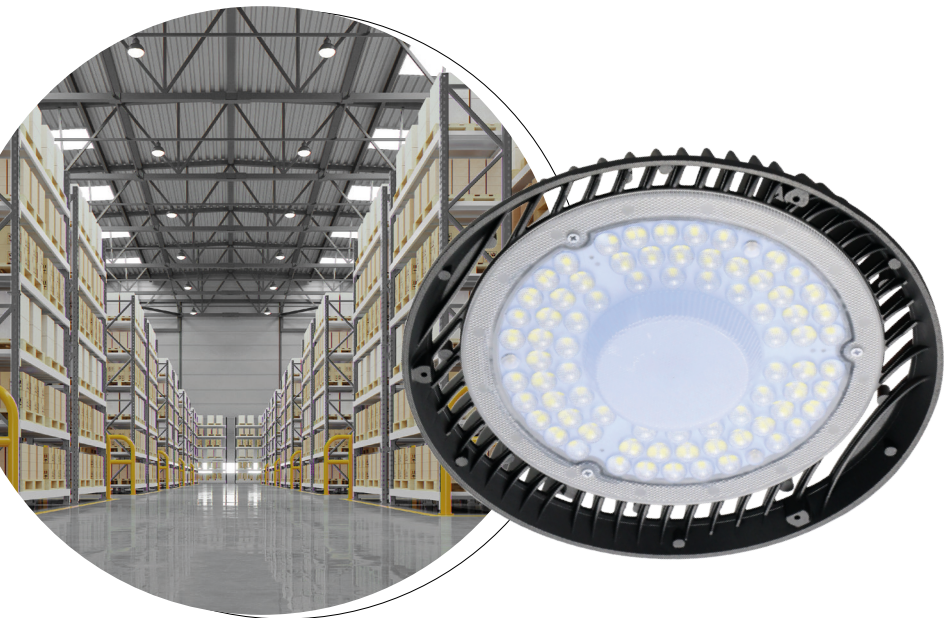

SPECIFICATIONS

EDO777606

Source type:	High-bay with built-in LED
Application:	indoor
Type of assembly:	surface-mounted
Installation site:	ceiling
Connection type:	free wire ends
Colour:	black
Material:	cover - aluminium, shift - PC
Dimensions [mm]:	
-height [mm]:	90mm
-width [mm]:	ø295mm
-wire lenght [mm]:	approx. 30cm
Adjustable:	no
Lampshade:	transparent
Replaceable light source:	no
Energy efficiency class [A-G]:	A D

Cooperation with a dimmer: no

TECHNICAL DATA


Power in the on-mode P_{on} [W]:	150W
Standby power P_{sb}/P_{net} [W]:	-
Rated voltage [V]:	180V-240V AC
Rated frequency [Hz]:	50-60 Hz
Color temperature [K]:	4000 K
Light color change:	no
Light distribution angle [°]:	90°
Color rendering index CRI:	≥70
Color rendering index R9:	13
Total luminous flux [lm]:	21000lm
Useful luminous flux [lm]:	18960lm
Measurement of the luminous flux in [°]:	wide cone (120°)
Luminous efficiency [lm/W]:	126,40lm/W
Rated life [h]:	25000h
Number of cycles on/off:	15000
On-mode energy consumption [kWh/1000h]:	150kWh/1000h
IP:	IP44
IK:	IK05
Protection class:	I
Mercury content:	no
Environmental conditions [°C]:	-20°C...40°C

LOGISTIC DATA

Collective packaging [pcs.]:	1pcs.
Weight [g]:	1392g
EAN:	



High-bay LED VITI PRO 150W

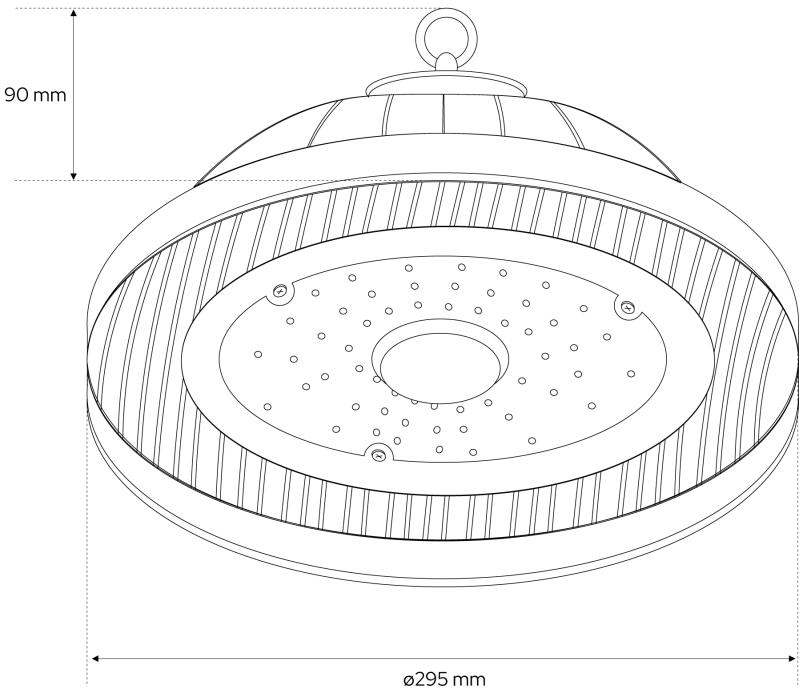

The presented photos are for illustration only and may slightly differ from reality. The appearance may depend, among others monitor settings or printing technology. The data presented in this document are not legally binding and are subject to change. The given results were obtained when examining a specific specimen.

Elhurt Plus S.A., Osieczany 585, 32-400 Myślenice, Poland, edo@edo-solutions.com