

# NASTRO LED



EDO777645



ENERGY

**EDO**  
EDO777645

A  
B  
C  
D  
E  
F  
G

← E

5

kWh/1000h

2019/2015

5W/m

600lm/m

cold white  
6000K

12 V  
DC

120°


IP22

III

5m

## LED tape - NASTRO LED SMD 5W CW

SPECIFICATIONS	EDO777645
Source Type:	LED SMD
Application:	indoor
Installation:	tape 3m
Dimensions:	
-length [mm]:	5000mm
-width [mm]:	8mm
-height [mm]:	2mm
-smallest division unit [mm]:	50mm
-cable length [mm]:	150mm
Number of LEDs per meter:	60LED/m
Energy efficiency class [A-G]:	<span style="background-color: yellow; color: black; padding: 2px 5px;">E</span>
Cooperation with a dimmer:	yes
Cover material:	-
TECHNICAL DATA	
Power in the on-mode P <sub>on</sub> [W]:	5W/m
Standby power P <sub>sb</sub> /P <sub>net</sub> [W]:	-
Rated voltage [V]:	12VDC
Color of the light:	cold white
Color temperature [K]:	6000K
Color rendering index CRI:	90
Useful luminous flux [lm]:	600lm/m
Measurement of the luminous flux in:	wide cone (120°)
Light distribution angle [°]:	120°
Rated life [h]:	30000h
Number of cycles on/off:	15000
On-mode energy consumption [kWh/1000h]:	5kWh / 1000h
IP	IP22
Protection class:	III
Mercury content	no
Environmental conditions:	-20...40 °C
LOGISTIC DATA	
Collective packaging [pcs.]:	40pcs.
Weight [g]:	95g
EAN:	

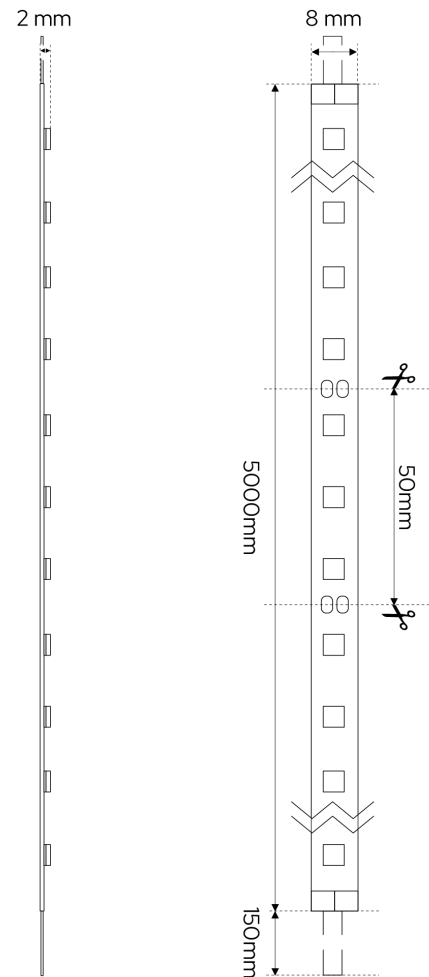

\*The specifications given are based on a 1m LED strip test.



The presented photos are for illustration only and may slightly differ from reality. The appearance may depend, among others monitor settings or printing technology. The data presented in this document are not legally binding and are subject to change. The given results were obtained when examining a specific specimen. Elhurt Plus S.A., Osieczany 585, 32-400 Myślenice, Poland, edo@edo-solutions.com