


NASTRO LED 4,8W/m CW



EDO77701

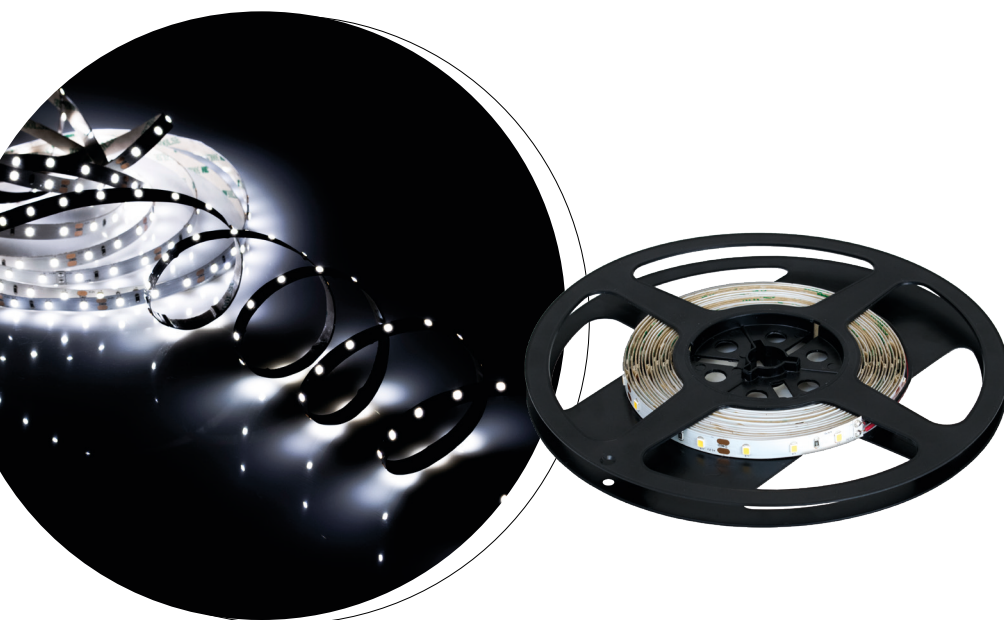

LED Tape NASTRO LED 4,8W/m CW

	ENERGY	4,8W/m
EDO EDO77701		500lm/m
A B C D E F G		gold white 6500K*
5 kWh/1000h		60m LED
		12 V DC
		120°
		IP20
		III
		5m

SPECIFICATIONS

Source type:	LED SMD
Application:	indoor
Installation:	tape 3M
Dimensions [mm]:	
-length:	5m
-width:	8mm
-height:	1,2mm
-smallest division unit:	50mm
-cable length:	200mm
Numbers of LEDs per meter:	60 LED/m
Energy efficiency class [A-G]:	F
Cooperation with a dimmer:	yes
cover material:	-


TECHNICAL DATA*

Power in the on-mode P_{on} [W]:	4,8W/m
Standby power P_{sb}/P_{net} [W]:	-
Rated voltage [V]:	DC 12V
Color of the light:	cold white
Color temperature [K]:	6500K ± 500K*
Color rendering index CRI:	80
Useful luminous flux [lm]:	500 lm/m
Measurement of the luminous flux in:	sphere (360 °)
Light distribution angle [°]:	120°
Rated life [h]:	50000h
On-mode energy consumption [kWh/1000h]:	5kWh / 1000h
IP:	IP20
Protection class:	III
Mercury content:	no
Environmental conditions [°C]:	-20...40°C

LOGISTIC DATA

Collective packaging [pcs.]:	60pcs.
Weight [g]:	100g
Weight with packaging [g]:	110g

EAN:

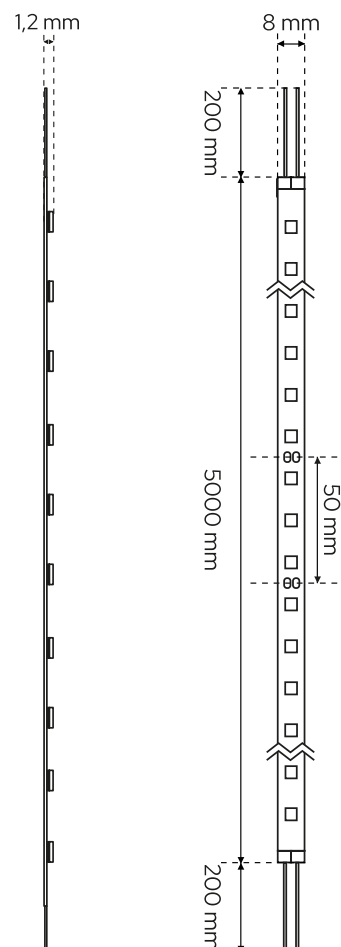

*The specifications given are based on a 1m LED strip test.

*Tolerance range for correlated color temperature ± 500K

