


# NASTRO LED 9,6W/m NW



EDO777702

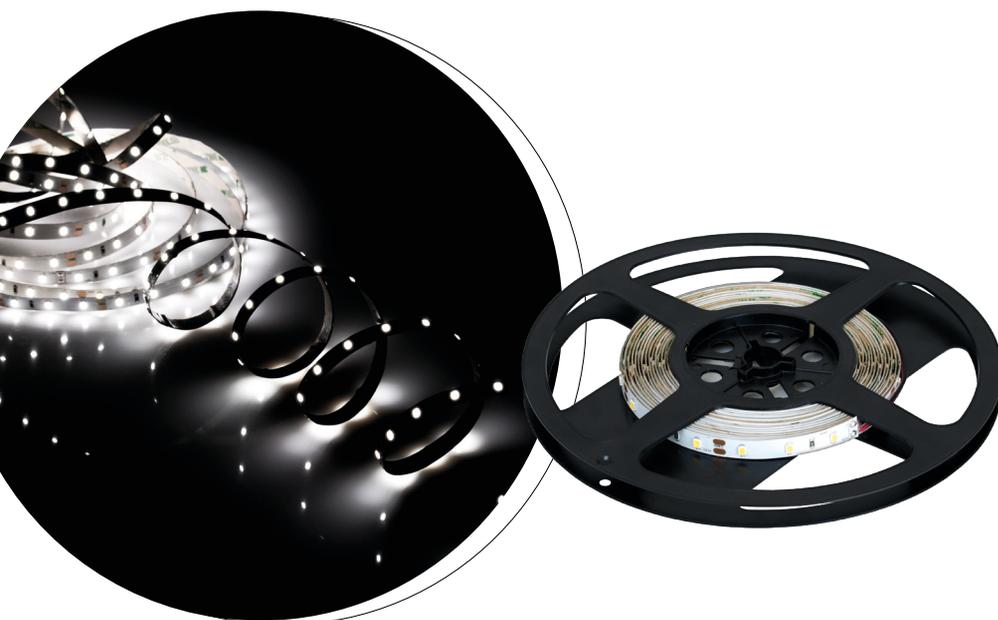

LED Tape NASTRO LED 9,6W/m NW

	<b>ENERGY</b>	9,6W/m
<b>EDO</b> EDO777702		990lm/m
A B C D E F G		neutral white 4000K*
		60m LED
		12 V DC
		120°
		IP20
		III
		5m
<b>10</b> kWh/1000h		2019/2015

## SPECIFICATIONS


Source type:	LED SMD
Application:	indoor
Installation:	tape 3M
Dimensions [mm]:	
-length:	5m
-width:	8mm
-height:	1,2mm
-smallest division unit:	50mm
-cable length:	200mm
Numbers of LEDs per meter:	60 LED/m
Energy efficiency class [A-G]:	<b>F</b>
Cooperation with a dimmer:	yes
cover material:	-

## TECHNICAL DATA\*

Power in the on-mode $P_{on}$ [W]:	9,6W/m
Standby power $P_{sb}/P_{net}$ [W]:	-
Rated voltage [V]:	DC 12V
Color of the light:	neutral white
Color temperature [K]:	4000K $\pm$ 200K*
Color rendering index CRI:	no
Useful luminous flux [lm]:	80
Measurement of the luminous flux in:	990 lm/m
Light distribution angle [°]:	sphere (360°)
Rated life [h]:	120°
On-mode energy consumption [kWh/1000h]:	50000h
IP:	10kWh/1000h
Protection class:	IP20
Mercury content:	III
Environmental conditions [°C]:	no
	-20...40°C

## LOGISTIC DATA

Collective packaging [pcs.]:	50pcs.
Weight [g]:	100g
Weight with packaging [g]:	110g
EAN:	

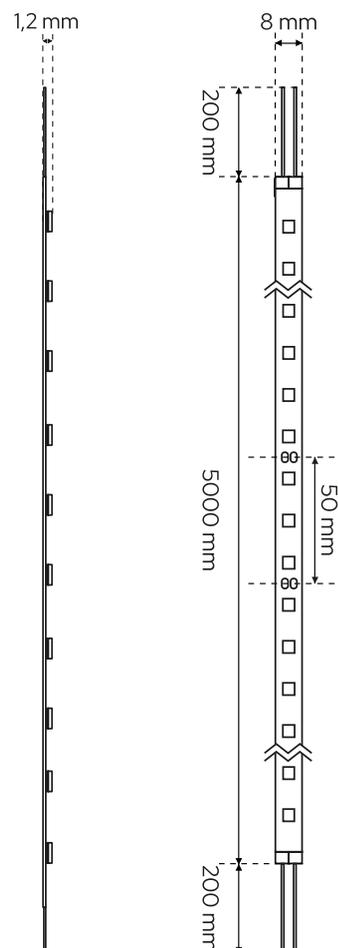

\*The specifications given are based on a 1m LED strip test.

\*Tolerance range for correlated color temperature  $\pm$  200K

