

$( \Box ]$	)® tions

EDO777615

 
 ↓
 ↓

 2400 m

 ↓

 2400 m

 3000K

 202240 V 506mz


 202240 V 506mz

 120°

 IP44

SPECIFICATIONS	ED0777615	
Source type:	Ceiling lamp with built-in LE	
Application:	indoor	
Type of assembly:	surface-mounted	
Installation site:	ceiling and wall	
Connection type:	screw cube	
Colour:	white cover with white fram	
Material:	cover and lampshade- PCV	
Dimensions [mm]:		
-width [mm]:	ø350mm	
-lenght [mm]:	-	
-height [mm]:	55mm	
Adjustable:	no	
Lampshade:	mat	
Replaceable light source:	no	
Energy efficiency class [A-g]:	₫ F	
Cooperation with a dimmer:	no	
TECHNICAL DATA		
Power in the on-mode Pon [W]:	24W	
Standby power Psb/Pnet [W]:	/	
Rated voltage [v]:	220-240V	
Rated frequency [Hz]:	50 Hz	
Color temperature [K]:	3000K	
Light color change:	no	
Light distribution angle [°]:	120°	
Color rendering index CRI:	80	
Color rendering index R9:	13	
Total luminous flux [Im]:	-	
Useful luminous flux [Im]:	2400lm	
Measurement of the luminous flux in [°]:	sphere (360°)	
Luminous efficiency [Im/w]:	100lm/W	
Rated life [h]:	25000h	
Number of cycles on/off:	15000	
On-mode energy consumption [kwh/1000h]:	24kWh/1000h	
IP:	IP44	
Protecion class:		
Mercury content:	no	
Environmental conditions [°c]:	-20°C40°C	
LOGISTIC DATA		
Collective packaging [pcs.]:	5pcs.	
Weight [g]:	616g	
EAN:	0	

©C€RoHS ℤ

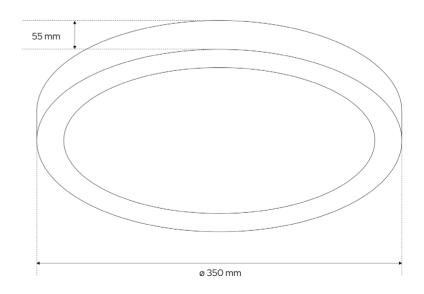

PERETI LED PRO White 24W WW

The presented photos are for illustration only and may slightly differ from reality. The appearance may depend, among others monitor settings or printing technology. The data presented in this document are not legally binding and are subject to change. The given results were obtained when examining a specific specimen. Elhurt Plus S.A., Osieczany 585, 32-400 Myślenice, Poland, edo@edo-solutions.com